



# 2322600713\_3-phase Bus Cable (10AWG,TC,2.4m)

RoHS


CHANGE NO.	CHANGE CONTENTS	REV.	NAME/DATE
①	Change the number of connectors	0.1	YFT 2021-9-24
②	Update the cable marking	0.2	YFT 2021-11-1
③	Update current; Update dimensions	0.3	YFT 2022-4-15
④	Update appearance; Update part name	0.4	YFT 2022-6-9
⑤	Update part name	0.5	YFT 2022-6-13
⑥	Update electrical parameters	0.6	YFT 2022-6-30

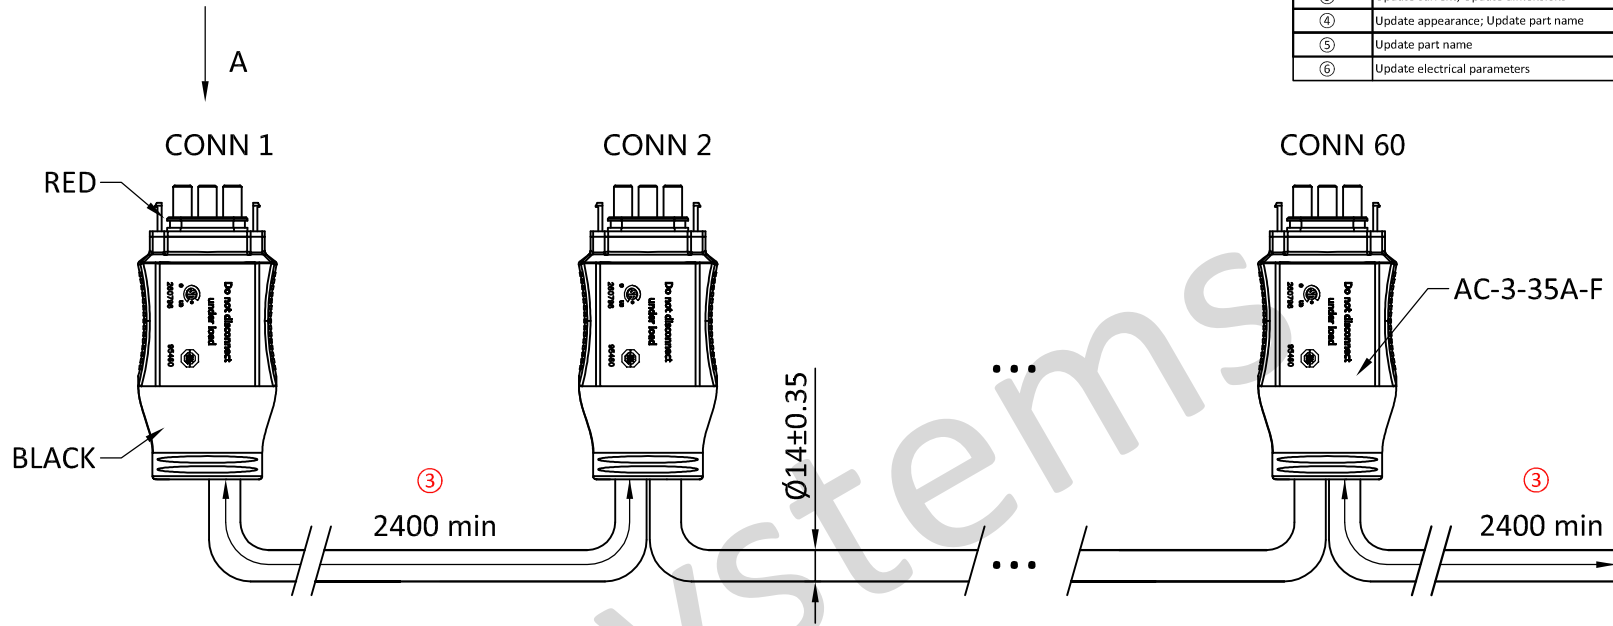

BACK VIEW



VIEW A

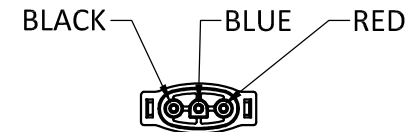

**Notes:**

- ② 1. Cable marking: E489601 (UL) TYPE TC-ER 3C/10AWG 90°C WET OR DRY 600V --- c(UL) TYPE CIC 90°C 600V FT1 XLPE 3C/10AWG FT4 DIR BUR SUN RES COLD BEND HWATEK ☉ Three-phase
- ① 2. Waterproof rating: IP67
- ③ 3. A series of bus cable contains 60 connectors, each connector spacing is 2400mm
- ④ 4. Wiring: BLACK-L1, RED-L2, BLUE-L3
- ③ ⑥ 5. Electrical parameters:  
 Working voltage rating: 600V  
 Working current rating cable 35A  
 Resistance voltage: AC 2500V 50mA 1 Minute  
 Conductor resistance: 3.409Ω/km
- 6. Use blank cartons for packaging and blue label

TOLERANCES UNLESS OTHERWISE SPECIFIED	
>0-100 ±5	>2500-3500 ±45
>100-500 ±10	>3500-4500 ±50
>500-900 ±15	>4500-5500 ±65
>900-1300 ±25	>5500-6500 ±80
>1300-1800 ±30	>6500-8000 ±90
>1800-2500 ±35	>8000-10000 ±100

MATERIAL	
DWN.	UNIT mm
CHK.	SHEET OF REV. 0.6



NAME  
3-phase Bus Cable ③  
(10AWG,TC,2.4m)

DRAWING NO.