

# SG125HV

## String Inverter for 1500 Vdc System



### HIGH YIELD

- Patented five-level topology, max. efficiency 98.9 %, European efficiency 98.7 %, CEC efficiency 98.5 %
- Full power operation without derating at 50 °C
- Patented anti-PID function

### SAVED INVESTMENT

- DC 1500V, AC 600V, low system initial investment
- 1 to 5MW power block design for lower AC transformer and labor cost
- Max.DC/AC ratio up to 1.5


### EASY O&M

- Virtual central solution, easy for O&M
- Compact design and light weight for easy installation


### GRID SUPPORT

- Compliance with both IEC and UL safety, EMC and grid support regulations
- Low/High voltage ride through(L/HVRT)
- Active & reactive power control and power ramp rate control

### CIRCUIT DIAGRAM

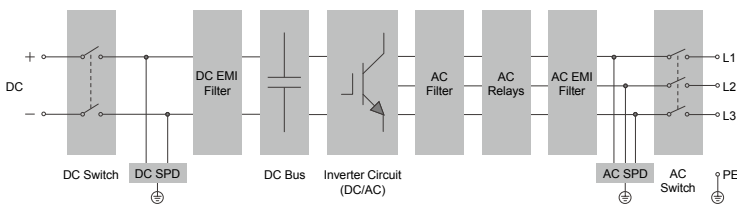

### EFFICIENCY CURVE

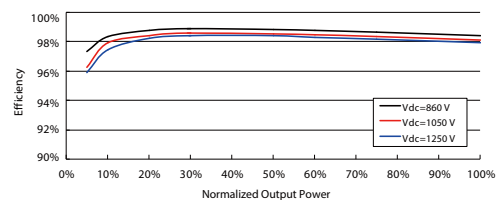

Type designation	SG125HV
<b>Input (DC)</b>	
Max. PV input voltage	1500 V
Min. PV input voltage / Start-up input voltage	860 V / 920 V
Nominal PV input voltage	1050 V
MPP voltage range	860 – 1450 V
MPP voltage range for nominal power	860 – 1250 V
No. of independent MPP inputs	1
No. of DC inputs	1
Max. PV input current	148 A
Max. DC short-circuit current	250 A
<b>Output (AC)</b>	
AC output power	125 kVA @ 50 °C
Max. AC output current	120 A
Nominal AC voltage	3 / PE, 600 V
AC voltage range	480 – 690 V
Nominal grid frequency / Grid frequency range	50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz
THD	< 3 % (at nominal power)
DC current injection	< 0.5 % I <sub>n</sub>
Power factor at nominal power / Adjustable power factor	> 0.99 / 0.8 leading - 0.8 lagging
Feed-in phases / connection phases	3 / 3
<b>Efficiency</b>	
Max. efficiency / European efficiency	98.9% / 98.7%
CEC efficiency	98.5%
<b>Protection</b>	
DC reverse connection protection	Yes
AC short-circuit protection	Yes
Leakage current protection	Yes
Grid monitoring	Yes
DC switch	Yes
AC switch	Yes
Q at night function	No
Anti-PID function	Yes
Overvoltage protection	DC Type II / AC Type II
<b>General Data</b>	
Dimensions (W*H*D)	670*902*296 mm 26.4"*35.5"*11.7"
Weight	76 kg 167.5 lb
Isolation method	Transformerless
Degree of protection	IP 65 NEMA 4X
Night power consumption	< 4 W
Operating ambient temperature range	-30 to 60 °C (> 50 °C derating) -22 to 140 °F (> 122 °F derating)
Allowable relative humidity range (non-condensing)	0 – 100 %
Cooling method	Smart forced air cooling
Max. operating altitude	4000 m (> 3000 m derating) 13123 ft (> 9843 ft derating)
Display / Communication	LED, Bluetooth+APP / RS485
DC connection type	OT or DT terminal (Max. 185 mm <sup>2</sup> 350 Kcmil)
AC connection type	OT or DT terminal (Max. 185 mm <sup>2</sup> 350 Kcmil)
Compliance	UL1741, UL1741SA, IEEEE1547, IEEEE1547.1, CSA C22.2 107.1-01-2001, FCC Part15 Sub-part B Class A Limits, California Rule 21, IEC 62109-1/-2, IEC 61000-6-2/-4, IEC 61727, IEC62116, BDEW, EN50549,VDE-AR-N 4110:2018, VDE-AR-N 4120:2018, UNE 206007-1:2013, P.O.12.3, UTE C15-712-1:2013, CEI 0-16:2017, IEC 61683, PEA, NTCO
Grid Support	LVRT, HVRT, ZVRT, active & reactive power regulation, PF control, soft start/stop



BayWa r.e. Solar Systems Inc.

4703-101 Street NW, T6E 5C6  
Edmonton, AB

Tel: +1 844 851 2390

solar.distribution@baywa-re.ca

